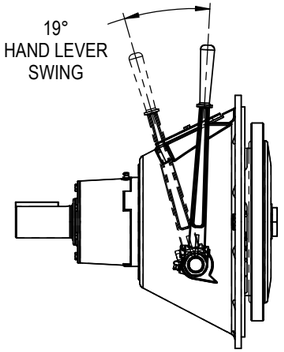

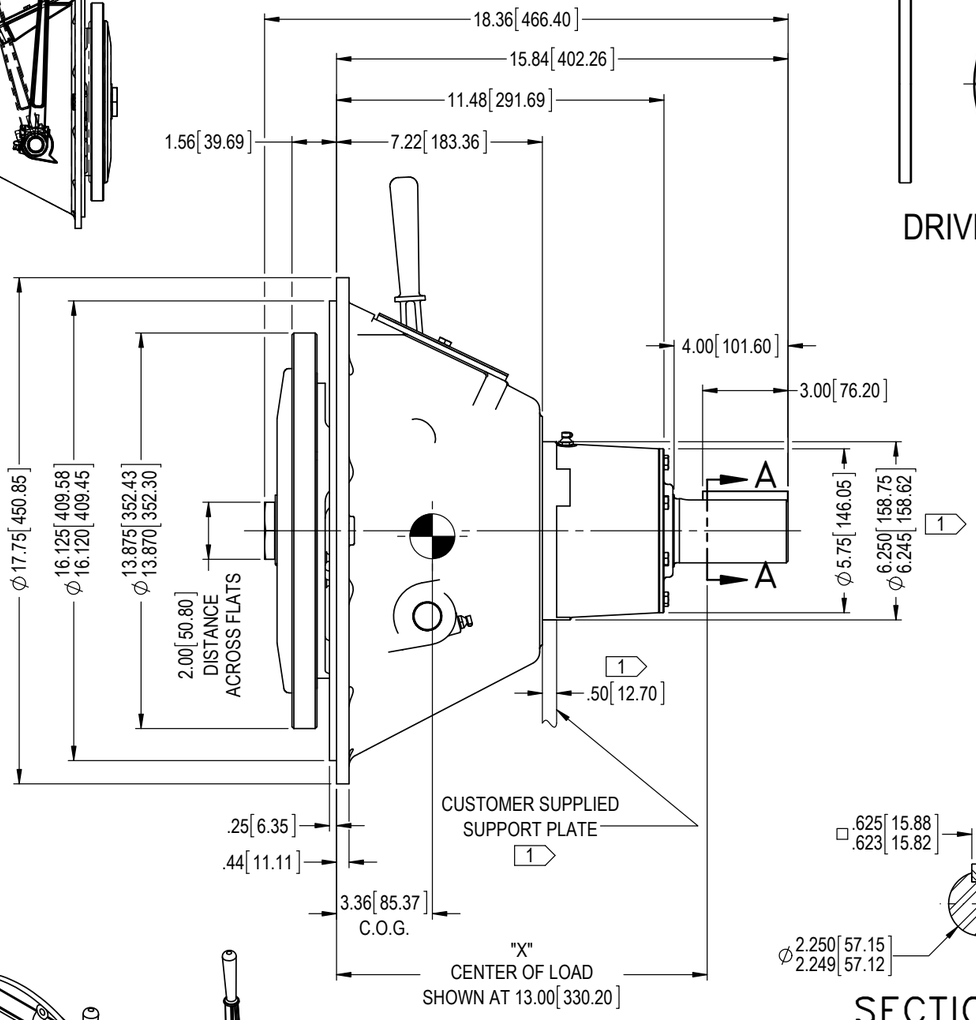

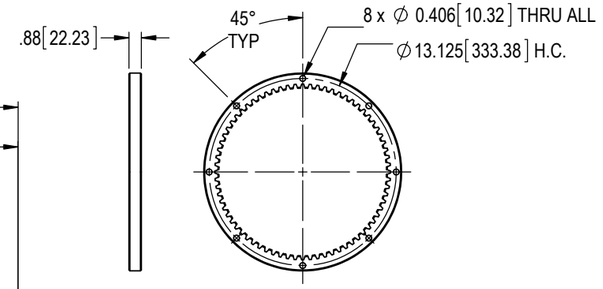

DRIVE RING



SECTION A–A

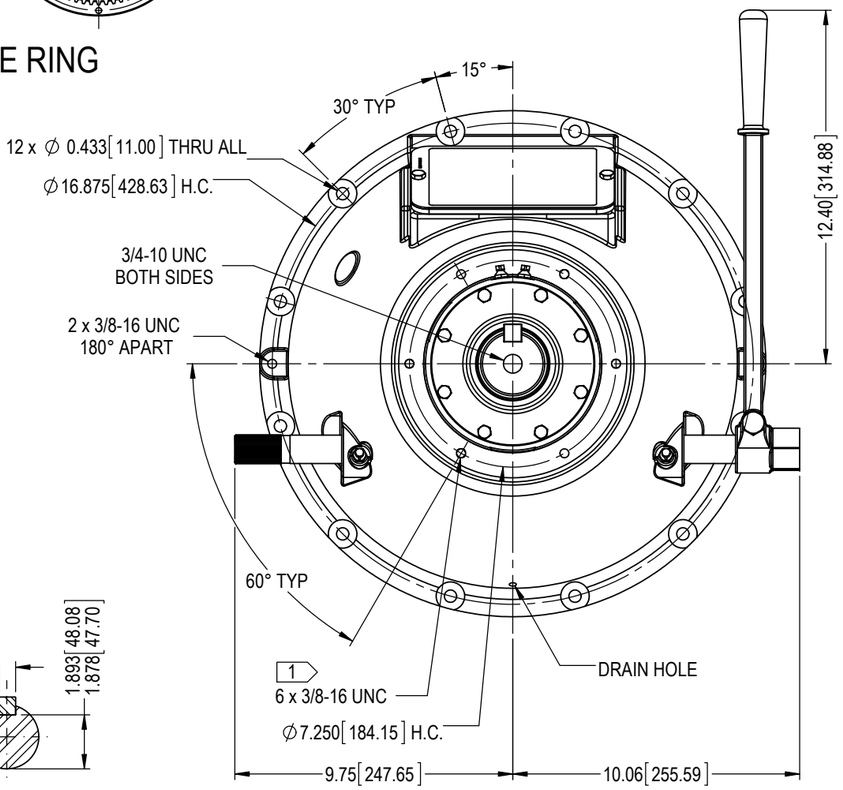





COMPLETE ASSEMBLY
EST WT = 162 lb [73.6 kg]

DRIVE RING & FRICTION DISCS
EST WT = 89.6 lb [40.6 kg]
EST WR² = 17 lb·ft² [0.716 kg·m²]

ALL ROTATING MEMBERS (PTO ENGAGED)
EST WR² = 21.6 lb·ft² [0.909 kg·m²]

1 CUSTOMER SUPPLIED OUTBOARD SUPPORT PLATE IS REQUIRED FOR SIDELOAD APPLICATIONS AND RECOMMENDED FOR IN-LINE APPLICATIONS.

REV	REVISIONS	DATE	BY
C	EC013345	9/22/2017	RC
B	EC012188	14 Jan 16	RC
A	EC012041	04 Dec 15	RC

WPT POWER CORPORATION ENGINEERING DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT AUTHORIZATION

WPT POWER CORPORATION

DRAWN	TDC	05 Feb 15
CHECKED	BDS	04 Mar 15
APPROVED	RC	09 Mar 15
ISSUED	HMA	09 Mar 15

THIRD ANGLE PROJECTION

WPL111 MECH PTO,SAE #3 BELLHOUSING,BRG COLLAR,PILOTLESS

PART NUMBER	REVISION	SHEET	OF
WTD-11-13F	C	1	1