

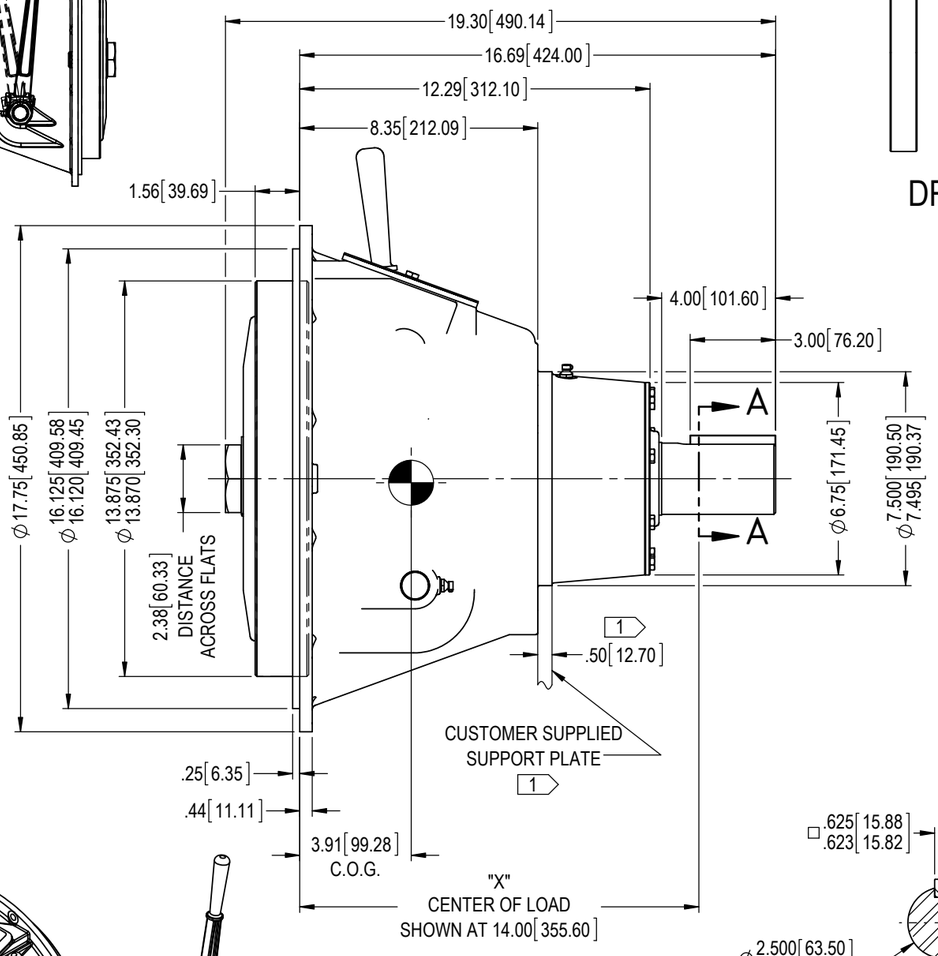

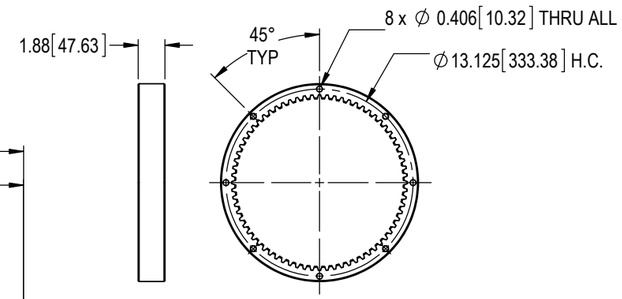

DRIVE RING

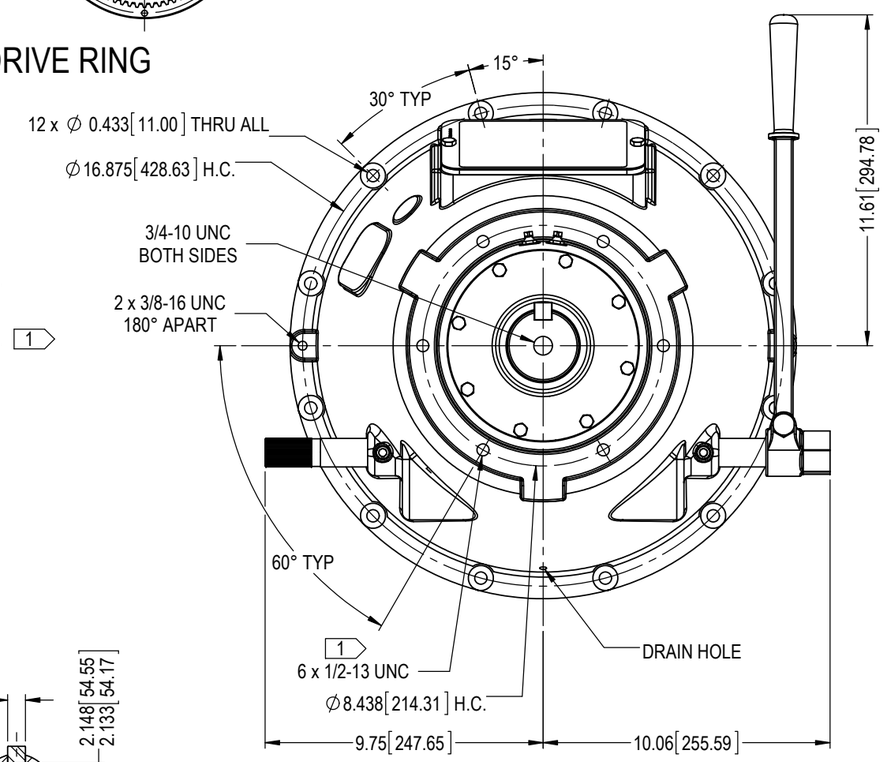

COMPLETE ASSEMBLY
EST WT = 212 lb [96.3 kg]

DRIVE RING & FRICTION DISCS
EST WT = 24.1 lb [10.9 kg]
EST WR² = 6.23 lb·ft² [0.262 kg·m²]

ALL ROTATING MEMBERS (PTO ENGAGED)
EST WR² = 6.56 lb·ft² [0.276 kg·m²]

1 CUSTOMER SUPPLIED OUTBOARD SUPPORT PLATE IS REQUIRED FOR SIDELOAD APPLICATIONS AND RECOMMENDED FOR IN-LINE APPLICATIONS.



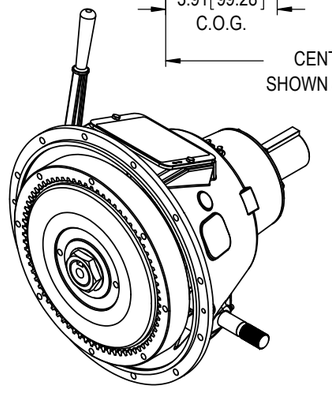



SECTION A–A

REV	REVISIONS	DATE	BY
G	EC013366	9/22/2017	RC
F	EC012919	16 Mar 17	RC
E	EC012520	17 Aug 16	TDC

WPT POWER CORPORATION ENGINEERING DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT AUTHORIZATION

WPT POWER CORPORATION

DRAWN	RC	04 Sep 15
CHECKED	BDS	9/28/2015
APPROVED	TDC	28 Sep 15
ISSUED	RC	28 Sep 15

THIRD ANGLE PROJECTION

WPL211 MECH PTO,SAE #3 BELLHOUSING,BRG COLLAR,PILOTLESS

PART NUMBER	REVISION	SHEET	OF
WTD-11-23G	G	1	1