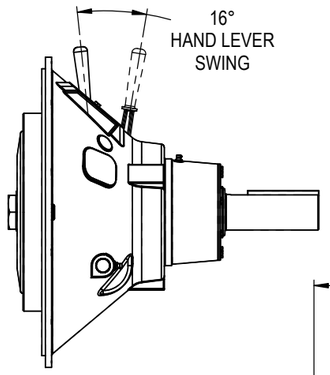

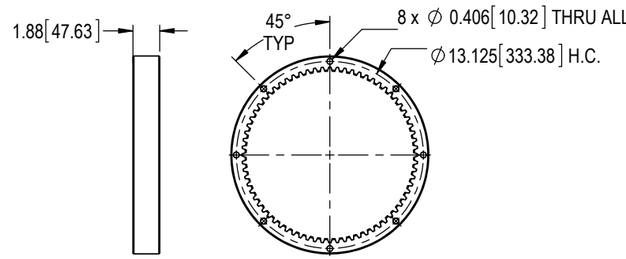

DRIVE RING

COMPLETE ASSEMBLY
EST WT = 223 lb [101 kg]

DRIVE RING & FRICTION DISCS
EST WT = 24.1 lb [10.9 kg]
EST WR² = 6.23 lb·ft² [0.262 kg·m²]

ALL ROTATING MEMBERS (PTO ENGAGED)
EST WR² = 6.58 lb·ft² [0.277 kg·m²]

1 CUSTOMER SUPPLIED OUTBOARD SUPPORT PLATE IS REQUIRED FOR SIDELOAD APPLICATIONS AND RECOMMENDED FOR IN-LINE APPLICATIONS.

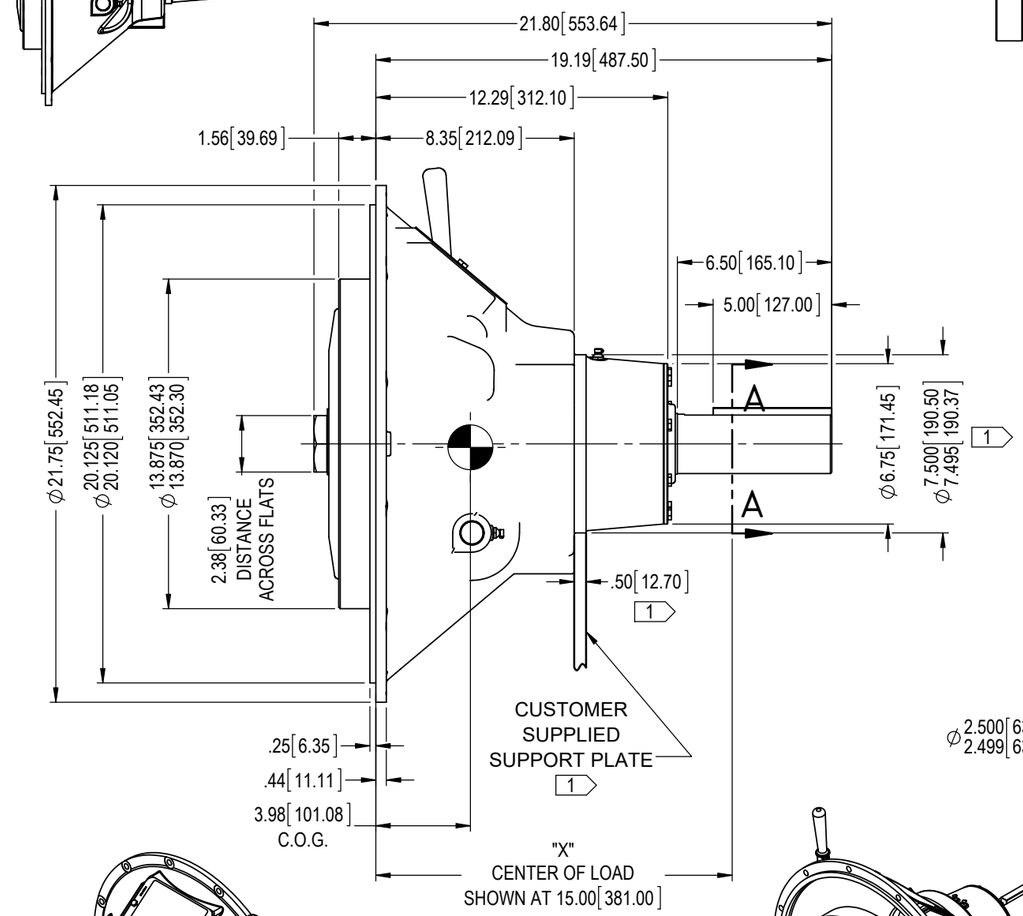

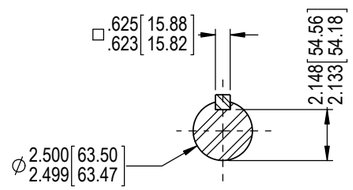

SECTION A–A

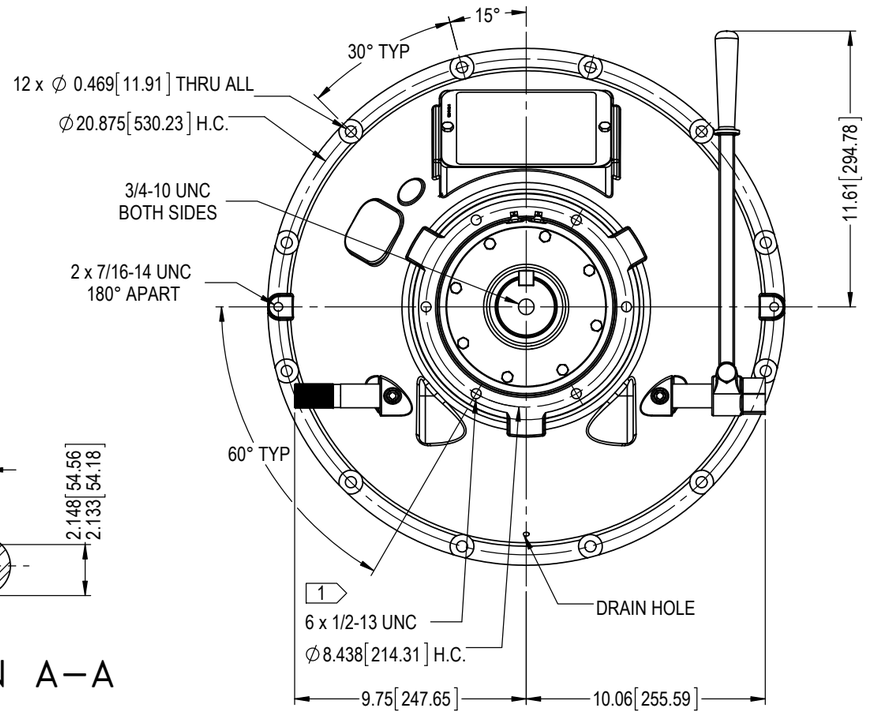





REV	REVISIONS	DATE	BY
C	EC013411	29 Sep 17	TDC
B	EC012924	16 Mar 17	RC

WPT POWER CORPORATION ENGINEERING DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT AUTHORIZATION

DRAWN	RC	DATE 07 Oct 16
CHECKED	RDH	DATE 10/7/2016
APPROVED	RDH	DATE 10/7/2016
ISSUED	RC	DATE 07 Oct 16

WPT POWER CORPORATION

WPL211 MECH PTO,SAE #1 BELLHOUSING,BRG COLLAR,PILOTLESS

THIRD ANGLE PROJECTION

PART NUMBER	REVISION	SHEET	OF
WTD-11-213	C	1	1