



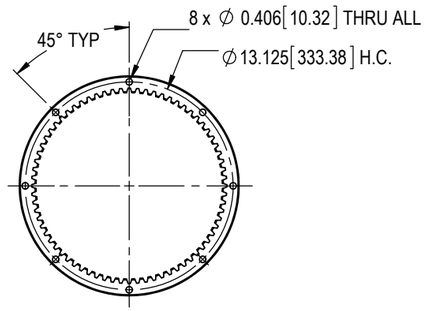

DRIVE RING

COMPLETE ASSEMBLY
EST WT = 342 lb [155 kg]

DRIVE RING & FRICTION DISCS
EST WT = 37 lb [16.8 kg]
EST WR² = 10 lb·ft² [0.423 kg·m²]

ALL ROTATING MEMBERS (PTO ENGAGED)
EST WR² = 10.9 lb·ft² [0.459 kg·m²]

1 CUSTOMER SUPPLIED OUTBOARD SUPPORT PLATE IS REQUIRED FOR SIDELOAD APPLICATIONS AND RECOMMENDED FOR IN-LINE APPLICATIONS.

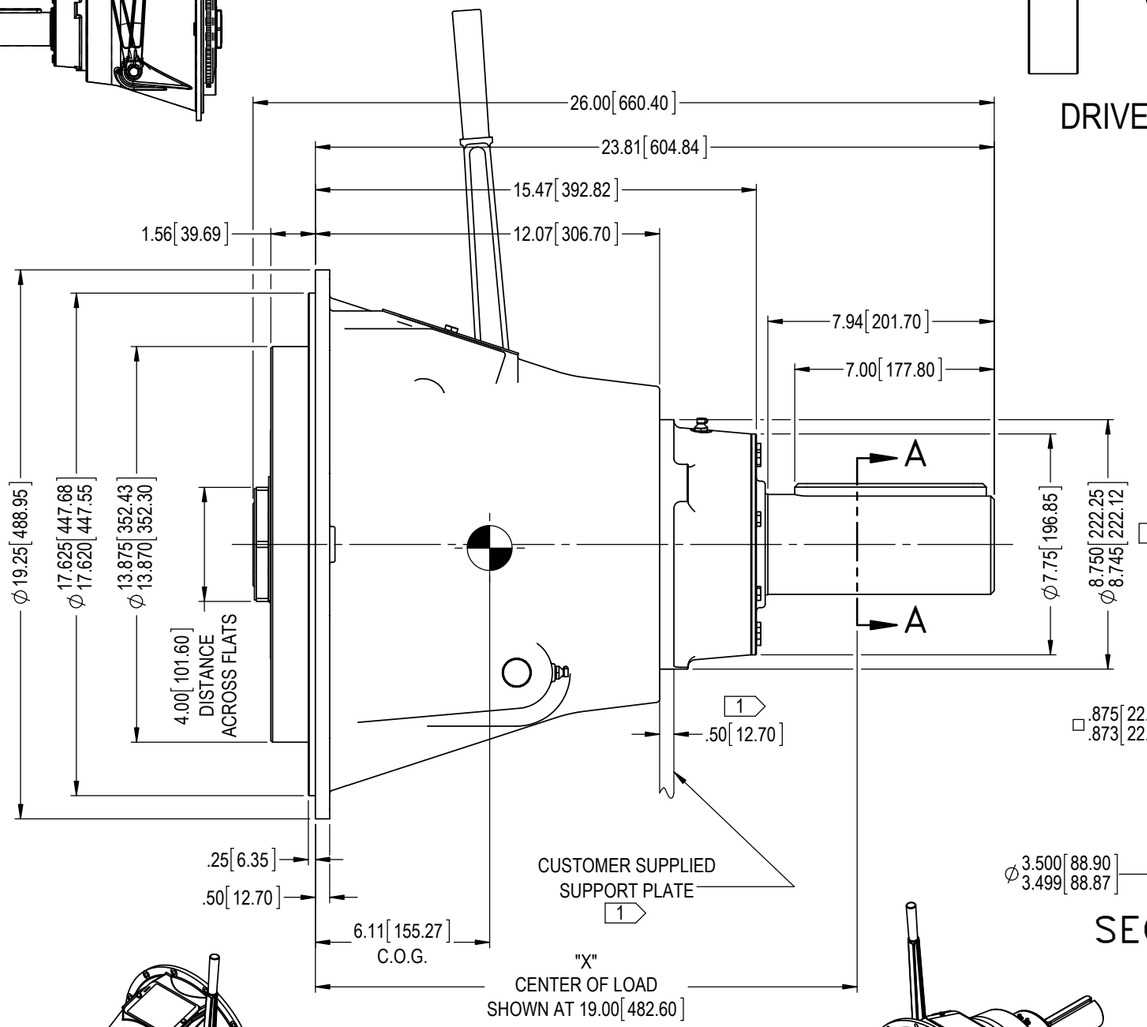

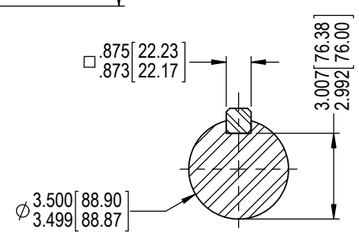

SECTION A–A

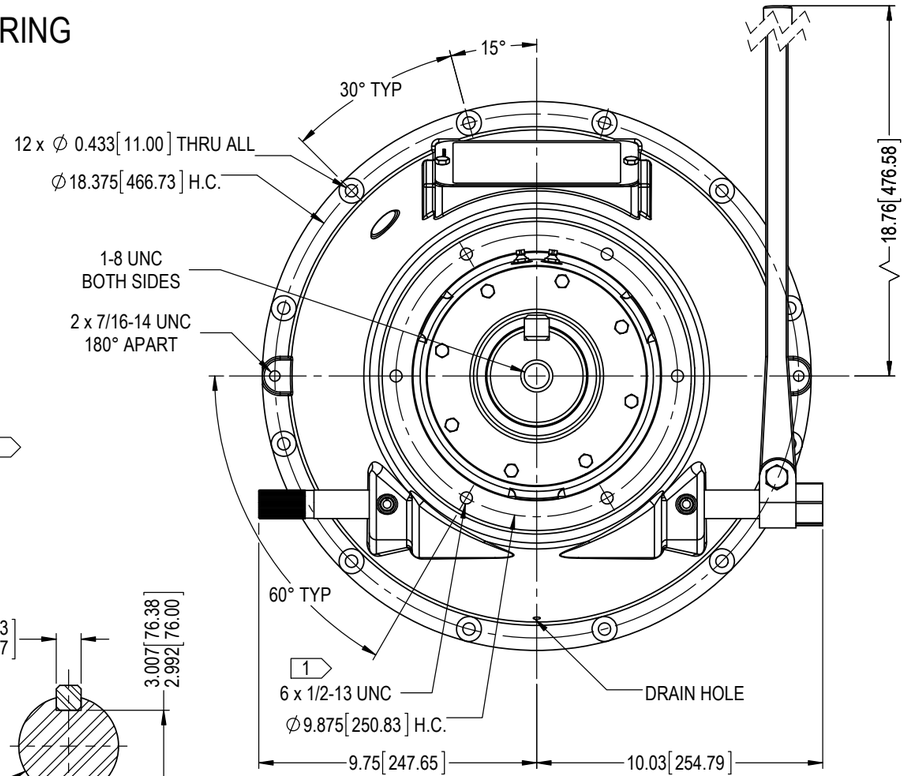





REV	REVISIONS	DATE	BY
E	EC013399	29 Sep 17	RC
D	EC012191	14 Jan 16	RC
C	EC012153	05 Jan 16	RC

WPT POWER CORPORATION ENGINEERING DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT AUTHORIZATION

WPT POWER CORPORATION

DRAWN	RC	12 Oct 15
CHECKED	RDH	13 Oct 15
APPROVED	BDS	10/13/2015
ISSUED	RC	13 Oct 15

THIRD ANGLE PROJECTION

WPL311 MECH PTO,SAE #2 BELLHOUSING,SEALED BALL BEARING COLLAR,PILOTLESS

PART NUMBER	REVISION	SHEET	OF
WTD-11-325	E	1	1